

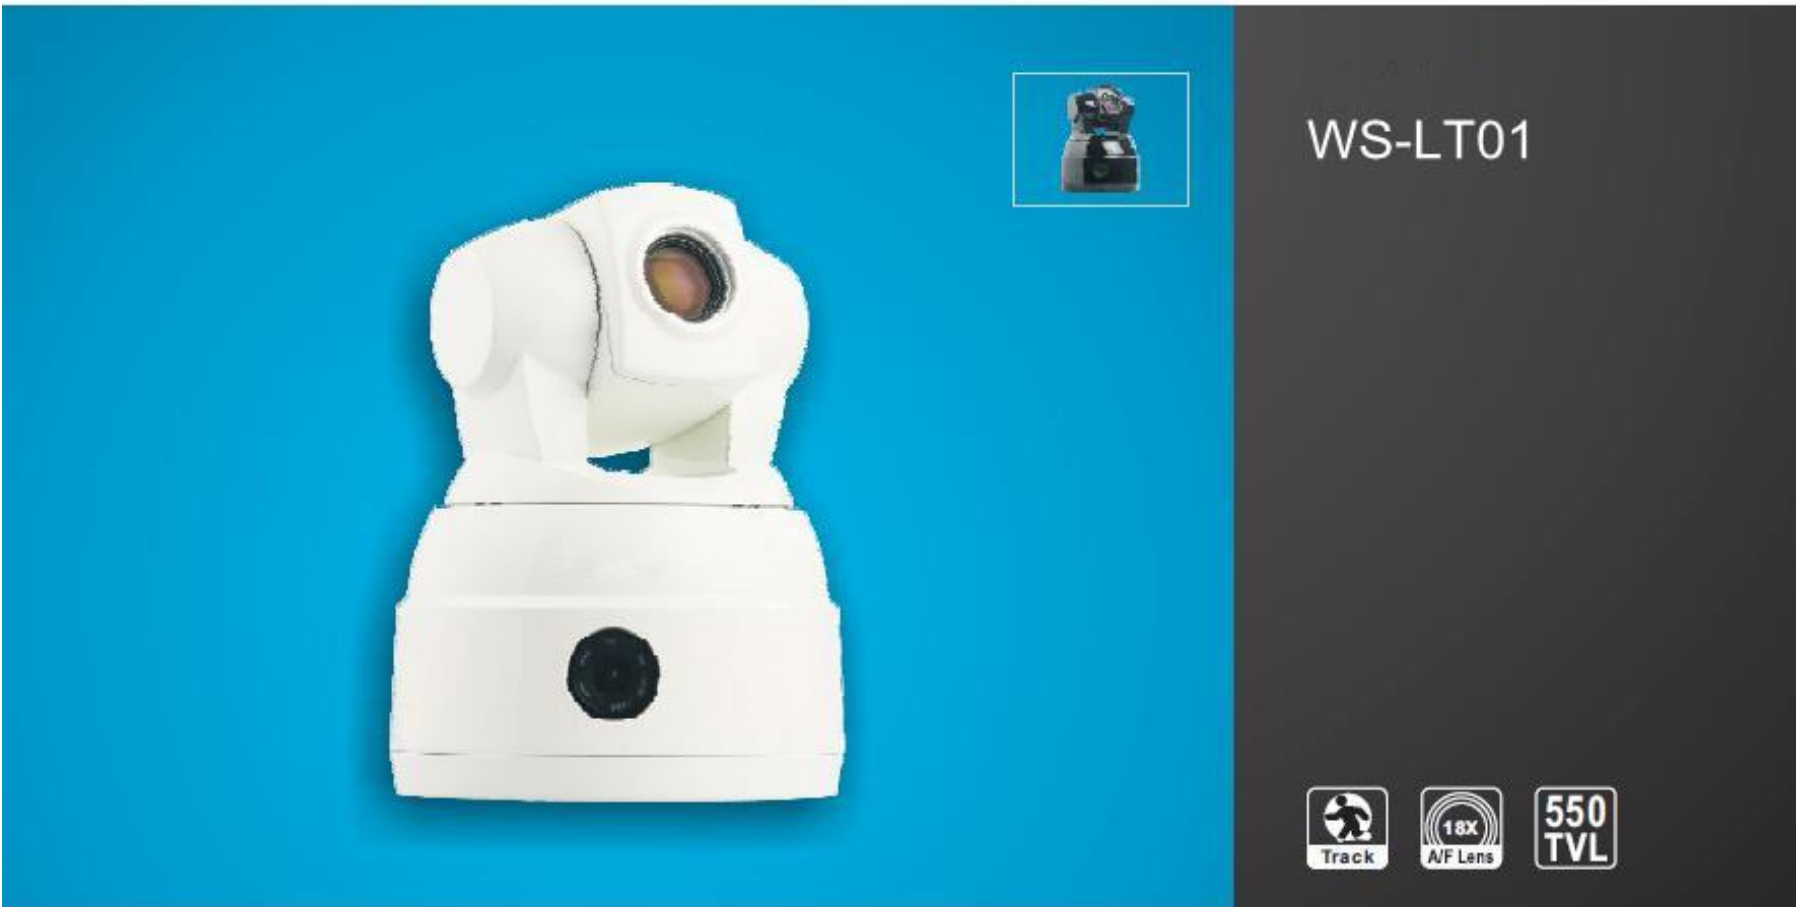


STANDARD DEFINITION LOCK-N-TRACK PTZ CAMERA



Dimensions

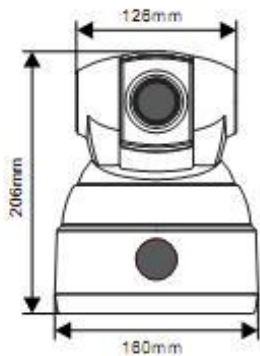

Stand Mount



Ceiling Mount

Specifications

- ※With advanced image algorithm to detect and track moving object,excellent tracking performance with high stability;
- ※Automatically Lock-N-Track moving object,Any change of light,object's gesture,interference of other moving object,or video playing from projector will not affect the tracking effect;
- ※Smooth tracking performance,no shaking image;
- ※18X optical zoom;
- ※With smooth and soft auto zooming function, always keep the object in the center of image with appropriate size;
- ※Smart AE technology to effectivelyavoid the interference of complicated lights from projectors, monitors etc;
- ※Anti projection interference;
- ※Easy to set effective tracking area and other value;
- ※Easy and simple installation,debugging and operation;
- ※Remote firmware upgrade via RS485;
- ※Support Pelco D protocol.

Specifications

Model	WS-LT01
Video System	PAL/NTSC
Image Sensor	1/4" SONY Exview HAD SONY FCB-EX48(P) zoom module
Effective Pixel	PAL:440k pixels; NTSC:380k pixels
Resolution	550TVL
Video Output	1.0±0.2Vp-p:75Ω; composite
S/N	≥50dB
Min.Illumination	0.02Lux
Synchronization	Internal

BLC	ON/OFF
Lens	F1.4-F3.0 ,f=4.1mm-73.8mm
Field of View	Wide 48° /Tele 2.8°
Optical Zoom	18X
P/T Speed	Pan:(0.1° -150°/s Tilt:0.1° -120°/s)
P/T Range	Pan:340°, Tilt:-30° -90°
Preset Number	64
Video Output Interface	CVBS
Control Interface	RS-485
Baud Rate	9600BPS
Protocol	PELCO-D
Working Temp	0°C- +50°C
Storage Temp	-20°C- +70°C
Humidity	≤95%(no-condensation)
Dimension	160(D) x 206(H)mm
※※※Product specification are subject to change without notice ※※※	

www.winsafecctv.com