


2MP HD-SDI Speed Dome

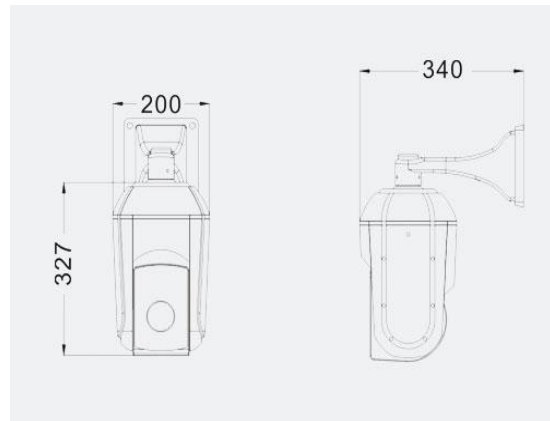

Features

- ※ Alluminum alloy sphrical shell design, compact structure. The shell is beautiful, durable, high proection strength, heating and cooling performance. Waterproof and dustproof grade: IP66, with lens and ligt boards isolated
- ※ With wiper function, eing able to clean the glass of lens
- ※ Support 128 presets(extensible to 256), horizontal 360°, vertical 230°(up to 25°). Support horizontal, vertical, pattern, with auto-flip function. Two random position storage/call, accurate positioning
- ※ Support multiple communication protocol and baud rate, high system compatibility
- ※ HD-SDI Output(Optional SONY FCB-EX6300)

Specification

Model	WS-HDSDI-020
Pick-up Device	1/2.8" SONY Exmor Sensor Progressive Scan
Scanning Area	Progressive Scan
Picture Element	2.0Mega Pixel 1920x1080(1080p)
TV System	50HZ:1080P@25fps; 60HZ:1080P@30fps
Manual Speed	Pan (0.4°~180°/S) Tilt (0.4°~80°/S)
Rotation	Pan 360°Continuously Tilt0-230° Auto Flip
Focus Speed	Speed adjustable base on focus distance
Min.illumination	0.095Lux
Preset	128
Function	Preset/Tour/Scan/Pattern
Display Zone	8 editable title zone
Alarm function	7CH Alarm in/2CH alarm out
Video Out	HD-SDI output, SMPTE-292M Stardard
Communicate	RS485
Protocol	Pelco-D, Pelco-P, Kalatel, VCL, MOLYNX, VICON
Baud Rate	2400 / 4800 /9600 / 19200bps
Camera ID	1 - 254
Operation temp.	-40°C - +60°C
Working Humidity	0 - 95% (None condensation)
Protection	IP66, TVS4000W Lightnin-proof, surge-proof and wave-proof
Power	AC 24V±4V
Consumption	13W(PTZ), 33W(PTZ + Heater)
Measure	L442 x W321 x H200mm
Weight	9.68KG

※※※Product specification are subject to change without notice ※※※

www.winsafecctv.com