




HIGH DEFINITION VIDEO CONFERENCE CAMERAS

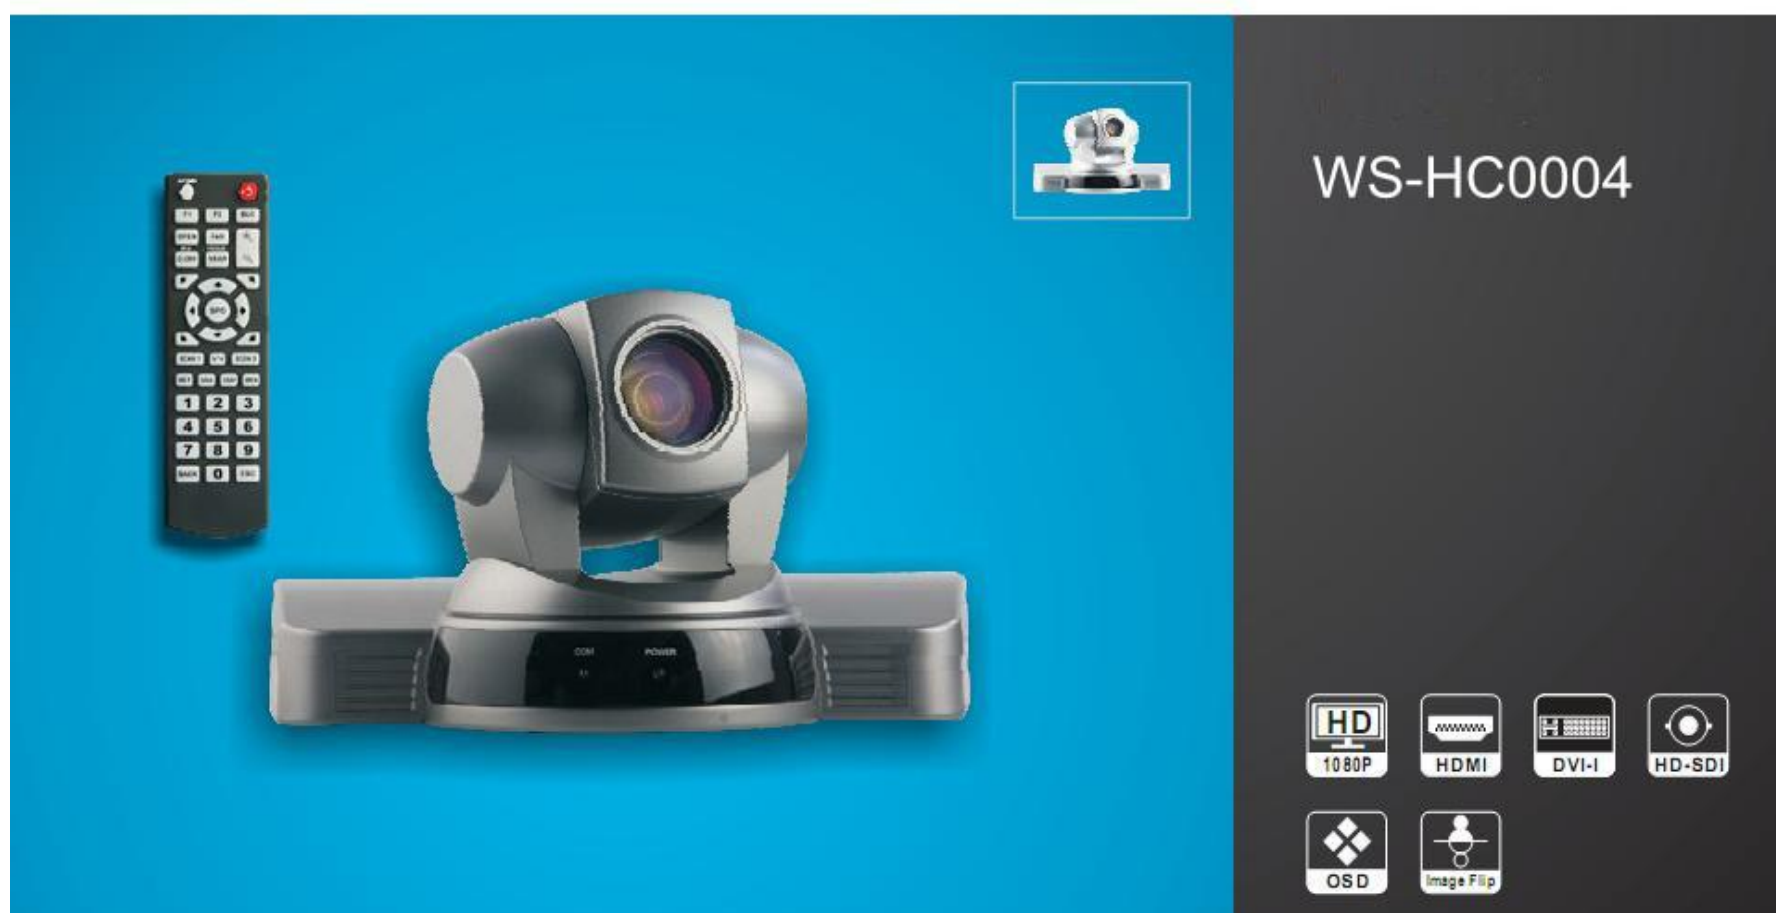

Dimensions

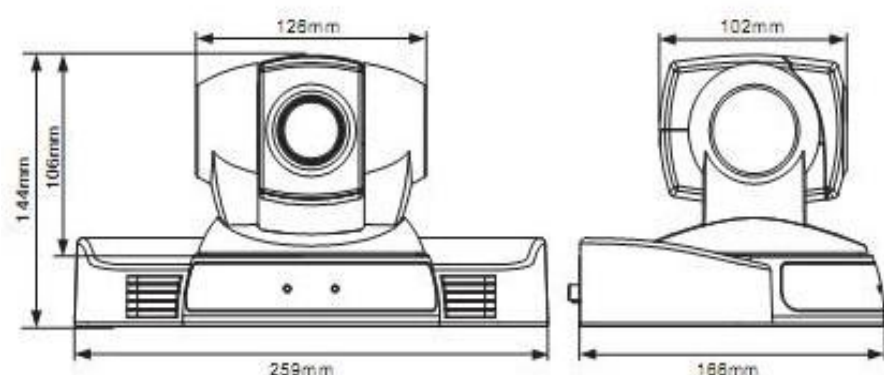

Rear View

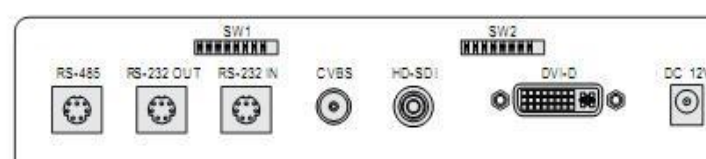

WS-HC0004

Specifications

- ※ 1/2.7" CMOS HD zoom module, 2Megapixel,18X optical zoom,4X digital zoom
- ※ Up to 1080P/60 HD Video output, suitable for HD TV transmission
- ※ Compatible with various video formats,including 59.94Hz,50Hz and SD Video etc
- ※ Video interface:Video, S-Video,Y/PbPr, DVI and SDI optional
- ※ OSD menu
- ※ Has image flip function
- ※ IR remote control of P/T/Z and other camera functions
- ※ Compact design with excellent mechanical design:low motion noise, precise positioning
- ※ Back light Compensation
- ※ RS232,RS485,RS422 interfaces
- ※ pelco D/P,VISCA protocol

Specifications

Model	WS-HC0004
Image Sensor	1/2.7" HC CMOS module,2Megapixel
HD Signal Format	HD:1080p/30,1080p/25,1080i/60,1080i/50,720p/60,720p/50,720p/30,720p/25 SD:NTSC,PAL
Shuter	1/2-1/10,000sec

Min.Illumination	12Lux(50IRE,F1.6)
Pan View Angle	Wide:55.2°
Optical Zoom	18X
Digital Zoom	4X
S/N Ratio	≥50dB
Synchronization	Internal
BLC	On/Off/Auto
Video Output	BNC 1.0±0.2Vp-p,75Ω
Pan/Tilt Speed	Pan:0.1° -200° /sec;Tilt:0.1° -150° /sec
Pan/Tilt Range	Pan:±150° ,Tilt:-30° ~90°
Preset Number	128
Image Flip	Yes
HD Video Output	HD:DVI-I(Support DVI-D,HDMI,YPbPr,VGA,5-BNC and etc.),HD-SDI SD:CVBS
Protocol	Pelco-D,Pelco-p,VISCA
Comm.Port	RS-485,RS-422,RS-232
Baud Rate	9600bps,19200bps,38400bps
Spectra Address	0-255
Storage Temperature	-20°C-+60° C
Operating Temperature	0° C-+40° C
Humidity	≤95%(non-condesation)
Power	12VDC, <10W
Dimension(W X H X L)	259mm x 166mm x 144mm

***Product specification are subject to change without notice ***

www.winsafecctv.com